
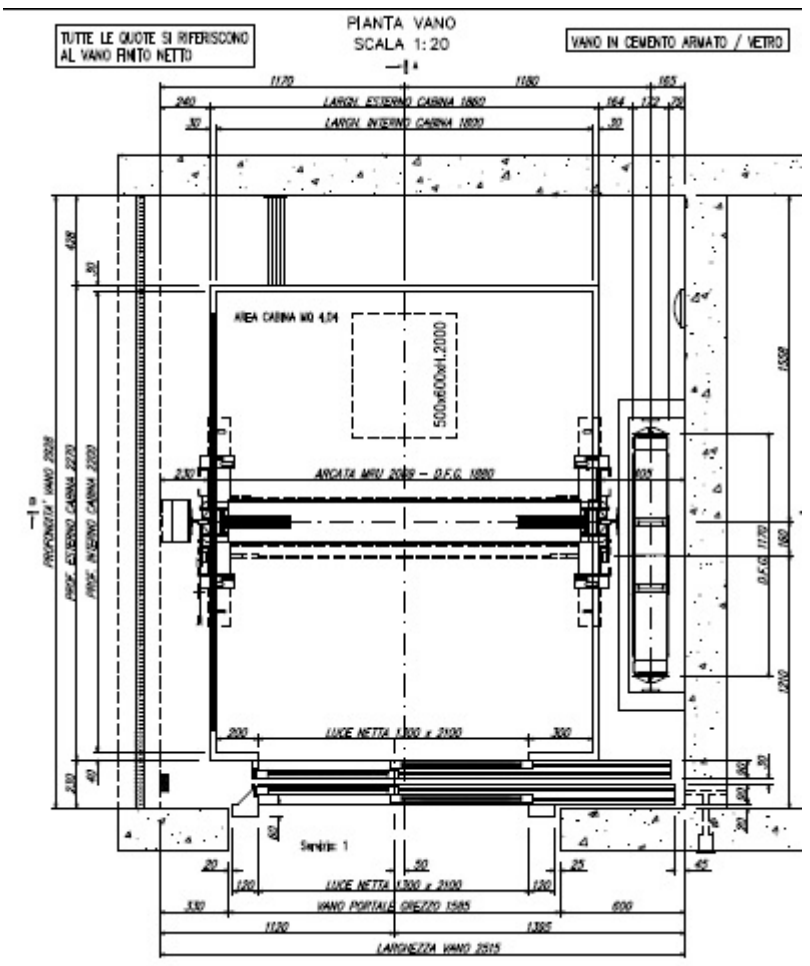


Duplex gearless MRL type Symbio made at Corbetta (MI)

**Gearless MRL SYMBIO with brushed stainless steel cabin and 1 panoramic wall,
Panoramic glass doors and satin-finished stainless steel profiles**

Principali vantaggi:
Optimisation of spaces: control panel in the door frame and motor in the shaft

- Energy efficiency:** consumption 14 Kw 45 A
- Available solutions:** single and double opposite access
- Safety:** automatic emergency and re-opening doors
- Flexibility:** wide range of finishes and customisation
- Reliability:** ride comfort and system stability
- Uses:** suitable for new buildings for commercial use

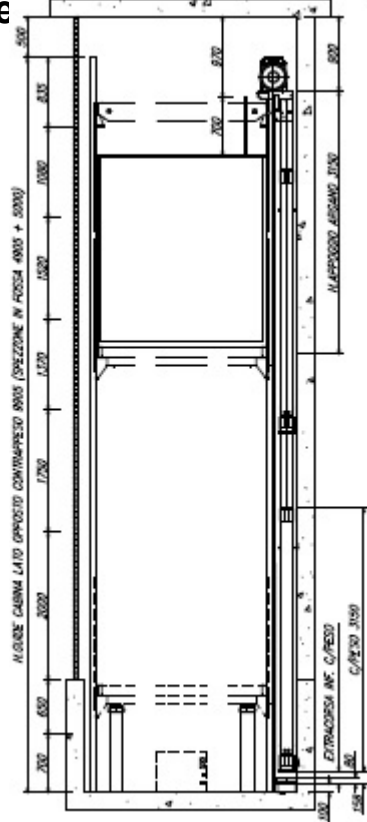

CARATTERISTICHE	
TIPO	N° 1 ASCENSORE
NORMATIVA	95/16 CE, EN 81-1+A3
PORTATA	2000 Kg
CAPIENZA	26
VELOCITA'	1,00 m/s
FERMATE	2
SERVIZI	2
MANOVRA	DUPLIX
TESTATA	4.050 mm
CORSA	5.005 mm
FOSSA	1.350 mm
DENOMINAZIONE PIANI	0, 1
DEN. PIANI 2° ENTRATA	
N° INGRESSI	UNO
SUPERFICIE CABINA	4,04 m2
TIPO DI VANO	CEMENTO ARMATO / VETRO

