
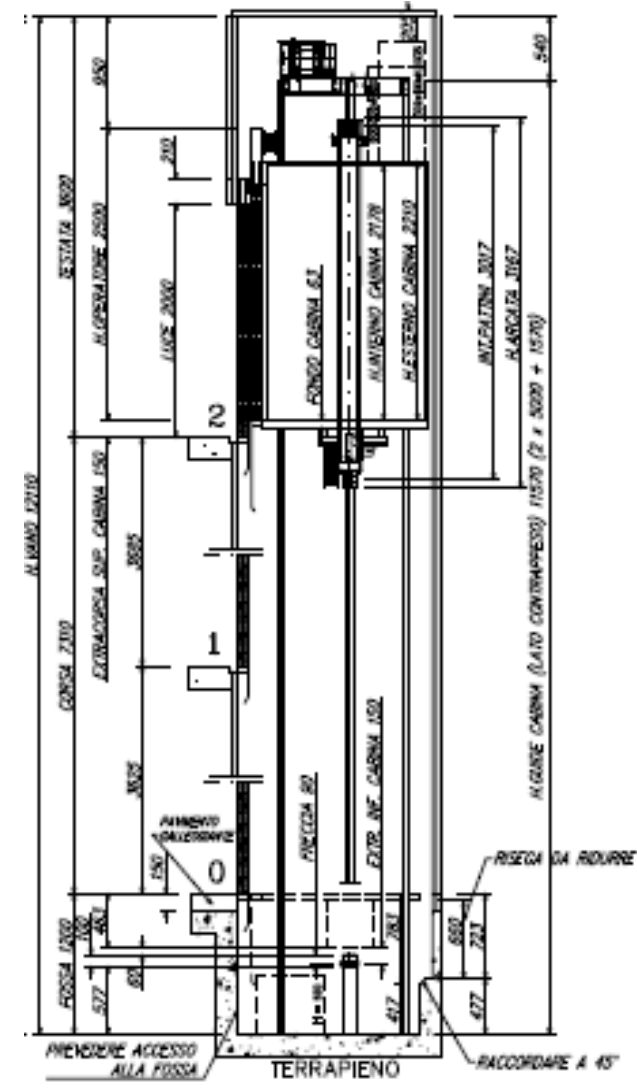


Gearless MRL SYMBIO in Premium structure
 with cabin, doors and panoramic glass structure walls and
 brushed stainless steel profiles, ideal for new commercial buildings

Main advantages:

- Optimisation of spaces: control panel in the door frame and motor in the shaft
- Energy efficiency: reduced consumption 3.9 Kw 9.5 A
- Available solutions: single and double opposite access
- Safety: automatic emergency and re-opening doors
- Flexibility: wide range of finishes and customisation
- Reliability: ride comfort and system stability
- Regulation: Lift Directive 2014/33/CE EN 81.1

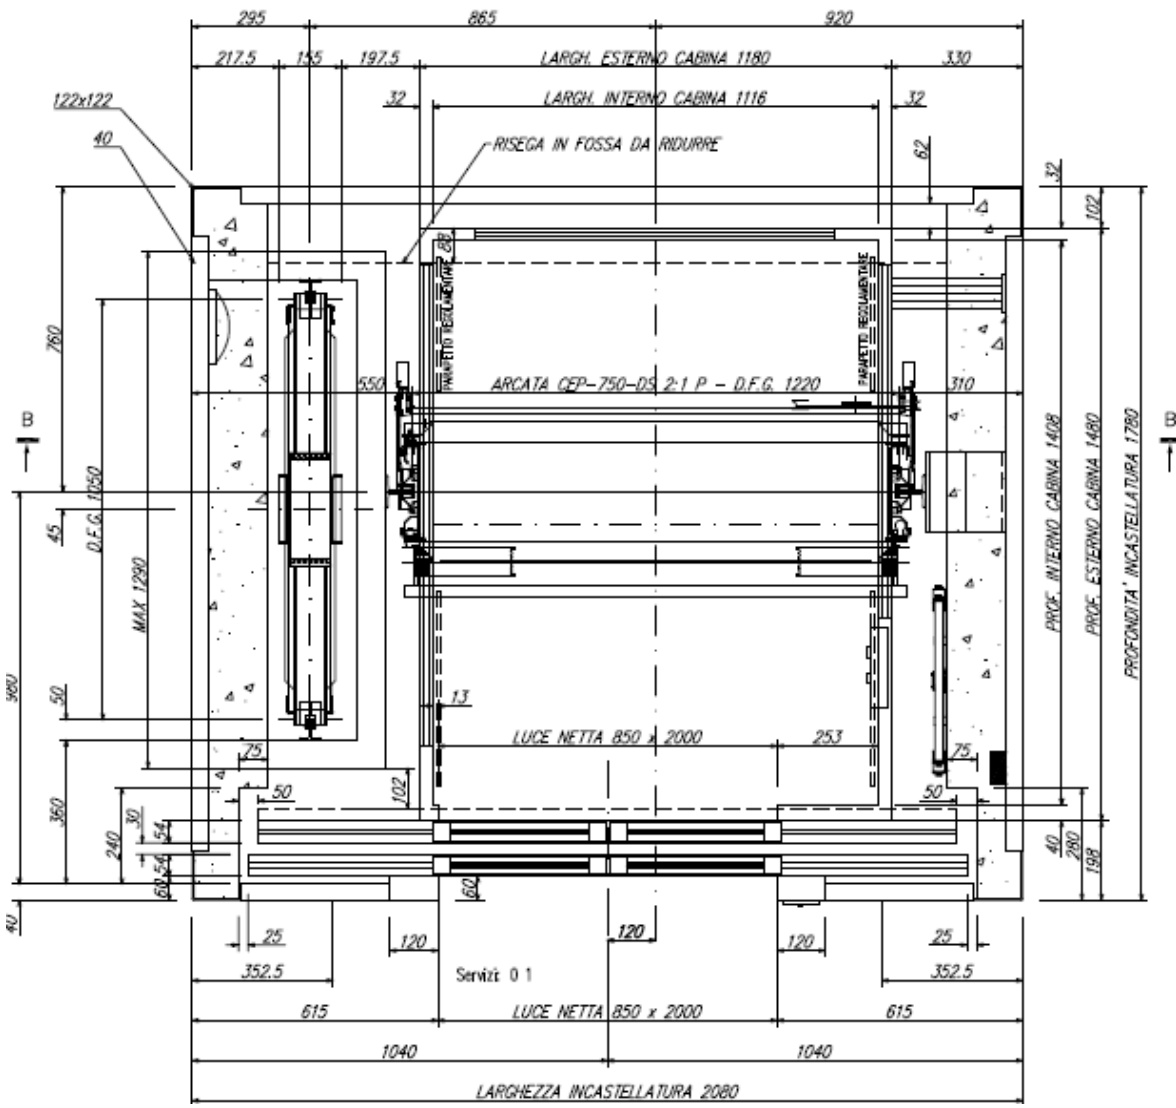

CARATTERISTICHE	
TIPO	N° 1 ASCENSORE
NORMATIVA	95/16 CE, EN 81-1+A3
PORTATA	630 Kg
CAPENZA	8
VELOCITA'	1,00 m/s
FERMATE	3
SERVIZI	3
MANOVRA	UNIVERSALE
TESTATA	3.600 mm
CORSA	7.310 mm
FOSSA	1.200 mm
DENOMINAZIONE PIANI	0, 1, 2
DEN. PIANI 2' ENTRATA	
N° INGRESSI	UNO
SUPERFICIE CABINA	1,59 m2
TIPO DI VANO	INCASTELLATURA METALLICA

